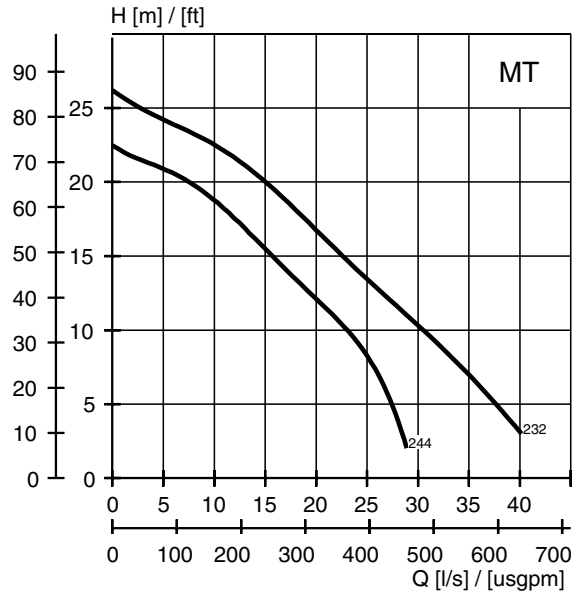
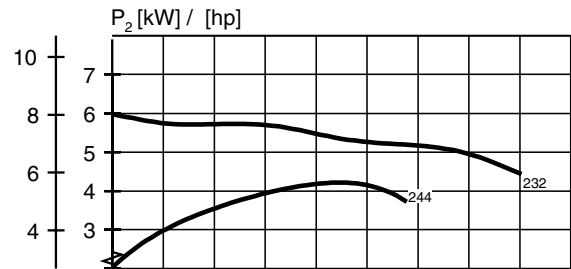


MT-Motor rating and performance curve

2102.041

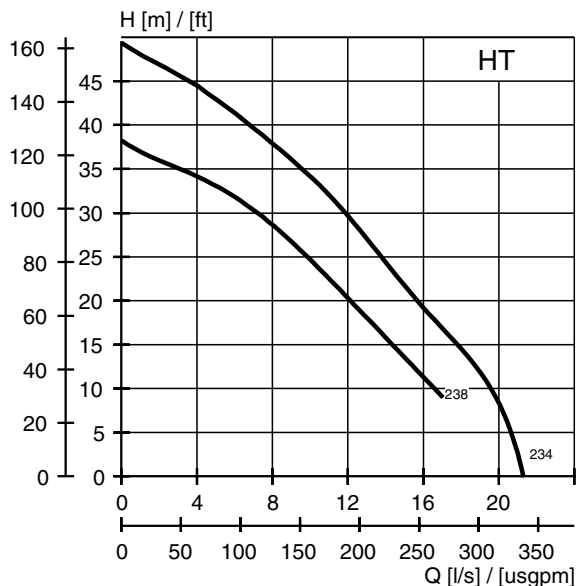
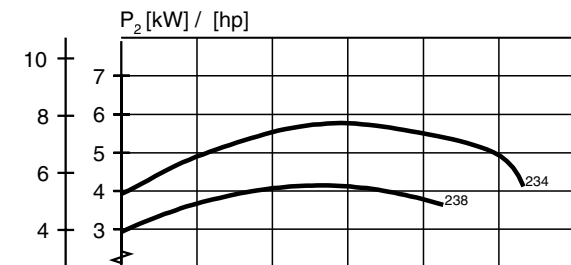
Curve/Impeller No	Rated Power, kW	Rated current, A	Starting current, A	Power factor cos ϕ	Ex proof version available
460 V, 60 Hz, 3 ~, 3420 r/min					
244	4,3	7,3	49,0	0,92	No
460 V, 60 Hz, 3 ~, 3450 r/min					
232	6,0	10,0	81,0	0,92	No
244	6,0	10,0	81,0	0,92	No
230 V, 60 Hz, 1 ~, 3455 r/min					
246	3,3	21,0	45,0	0,90	No
230 V, 60 Hz, 1 ~, 3510 r/min					
244	4,5	25,0	109	1,00	No
246	4,5	25,0	109	1,00	No

Y/D starting current is approximately 1/3 of D starting current.


HT-Motor rating and performance curve

2102.041

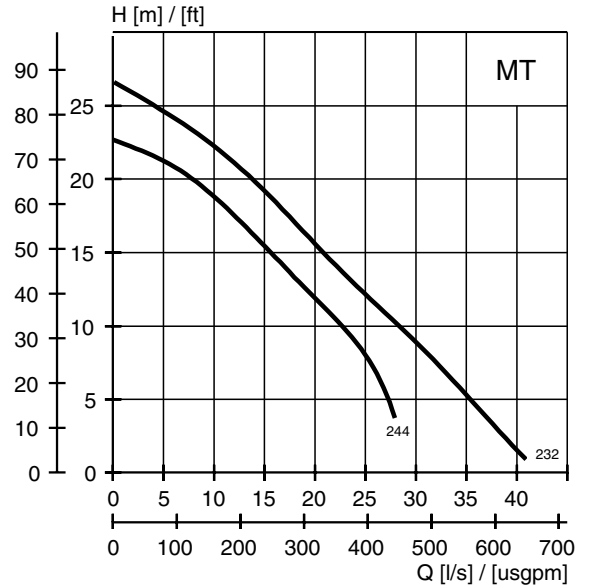
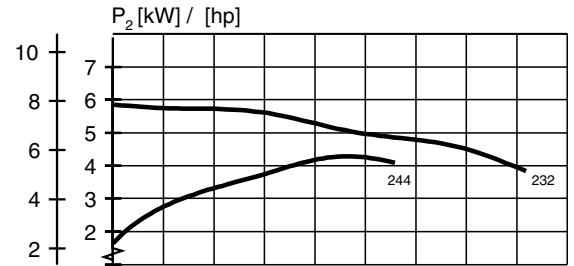
Curve/Impeller No	Rated Power, kW	Rated current, A	Starting current, A	Power factor cos ϕ	Ex proof version available
460 V, 60 Hz, 3 ~, 3420 r/min					
238	4,3	7,3	49,0	0,92	No
240	4,3	7,3	49,0	0,92	No
460 V, 60 Hz, 3 ~, 3450 r/min					
234	6,0	10,0	81,0	0,92	No
238	6,0	10,0	81,0	0,92	No
230 V, 60 Hz, 1 ~, 3455 r/min					
240	3,3	21,0	45,0	0,90	No
230 V, 60 Hz, 1 ~, 3510 r/min					
238	4,5	25,0	109	1,00	No

Y/D starting current is approximately 1/3 of D starting current.


MT-Motor rating and performance curve

2102.220

Curve/Impeller No	Rated Power, kW	Rated current, A	Starting current, A	Power factor $\cos \phi$	Ex proof version available
460 V, 60 Hz, 3 ~, 3415 r/min					
232	6,0	10,0	69,0	0,93	No
460 V, 60 Hz, 1 ~, 3515 r/min					
244	4,5	25,0	109	1,00	No

Y/D starting current is approximately 1/3 of D starting current.


HT-Motor rating and performance curve

2102.220

Curve/Impeller No	Rated Power, kW	Rated current, A	Starting current, A	Power factor $\cos \phi$	Ex proof version available
460 V, 60 Hz, 3 ~, 3415 r/min					
234	6,0	10,0	69,0	0,93	No
230 V, 60 Hz, 1 ~, 3515 r/min					
238	4,5	25,0	109	1,00	No

Y/D starting current is approximately 1/3 of D starting current.
