


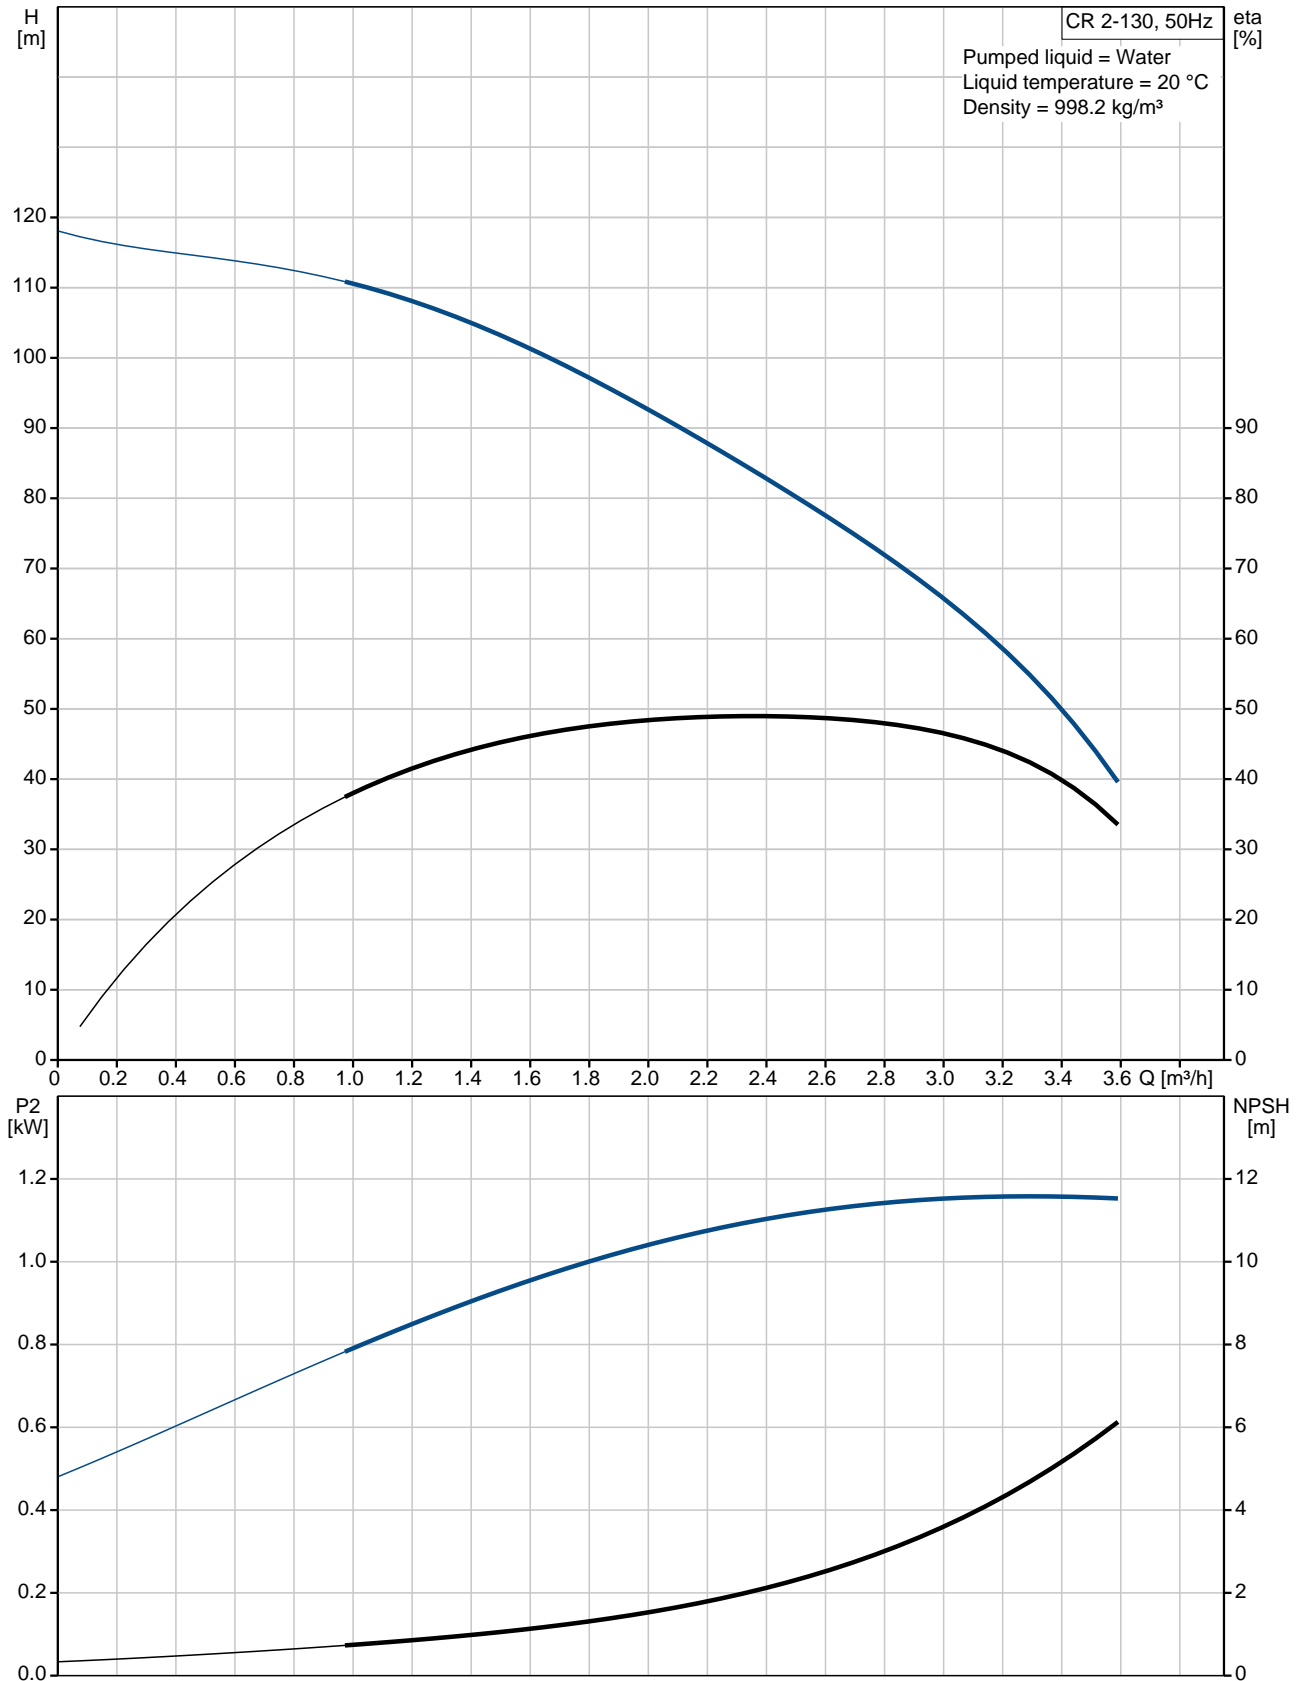


Position	Qty.	Description
	1	<p>CR 2-130 A-F-A-BUBV</p>  <p style="text-align: center;">Note! Product picture may differ from actual product</p> <p>Product No.: 40597013 Vertical, non-self-priming, multistage, in-line, centrifugal pump for installation in pipe systems and mounting on a foundation.</p> <p>The pump has the following characteristics:</p> <ul style="list-style-type: none"> - Impellers and intermediate chambers are made of Stainless steel, DIN W.-Nr. 1.4301. - Pump head and base are made of Cast iron. - The shaft seal has assembly length according to EN 12756. - Power transmission is via cast iron split coupling. - Pipework connection is via DIN flanges. <p>The motor is a 3-phase AC motor.</p> <p>Liquid: Pumped liquid: Water Liquid temperature range: -15 .. 120 °C Liquid temp: 20 °C Density: 998.2 kg/m³</p> <p>Technical: Speed for pump data: 2900 rpm Rated flow: 2.5 m³/h Rated head: 81.9 m Shaft seal: BUBV</p> <p>Materials: Pump housing: Cast iron EN-JL1030 ASTM 25 B Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304</p> <p>Installation: Maximum ambient temperature: 40 °C Max pressure at stated temp: 16 bar / 120 °C Flange standard: DIN</p>

Position	Qty.	Description
		Pipe connection: DN 25 Pressure stage: PN 25 Flange size for motor: F115 Electrical data: Motor type: 90SA Number of poles: 2 Rated power - P2: 1.5 kW Mains frequency: 50 Hz Rated voltage: 3 x 200-220 D/346-380 Y V Rated current: 6,45/3,75 A Starting current: 630-690 % Cos phi - power factor: 0,85-0,79 Rated speed: 2860-2890 rpm Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Others: Net weight: 36 kg Gross weight: 39 kg Shipping volume: 0.07 m3



40597013 CR 2-130 50 Hz



Description	Value
Product name:	CR 2-130 A-F-A-BUBV
Product No:	40597013
EAN number:	5700390651657
Price:	On request
Technical:	
Speed for pump data:	2900 rpm
Rated flow:	2.5 m³/h
Rated head:	81.9 m
Impellers:	13
Shaft seal:	BUBV
Pump type:	CR 2
Pump No:	40590013
Stages:	13
Pump version:	A
Model:	D
Materials:	
Pump housing:	Cast iron EN-JL1030 ASTM 25 B
Impeller:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Material code:	A
Installation:	
Maximum ambient temperature:	40 °C
Max pressure at stated temp:	16 bar / 120 °C
Flange standard:	DIN
Connect code:	F
Pipe connection:	DN 25
Pressure stage:	PN 25
Flange size for motor:	F115
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-15 .. 120 °C
Liquid temp:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	90SA
Number of poles:	2
Rated power - P2:	1.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 200-220 D/346-380 Y V
Rated current:	6,45/3,75 A
Starting current:	630-690 %
Cos phi - power factor:	0,85-0,79
Rated speed:	2860-2890 rpm
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	NONE
Motor No:	85325906
Others:	
Net weight:	36 kg
Gross weight:	39 kg
Shipping volume:	0.07 m3

