



DIMENSIONI DI INGOMBRO E PESI
 DIMENSIONS D'ENCOMBREMENT ET POIDS
 OVERALL DIMENSIONS AND WEIGHTS

CARATTERISTICHE DI FUNZIONAMENTO A 2 POLI / 50 Hz
 CARACTERISTIQUES DE FONCTIONNEMENT A 2 POLES / 50 Hz
 PERFORMANCES CURVES AT 2 POLES / 50 Hz

Semiassiale - Demi-axiale - Mixed flow

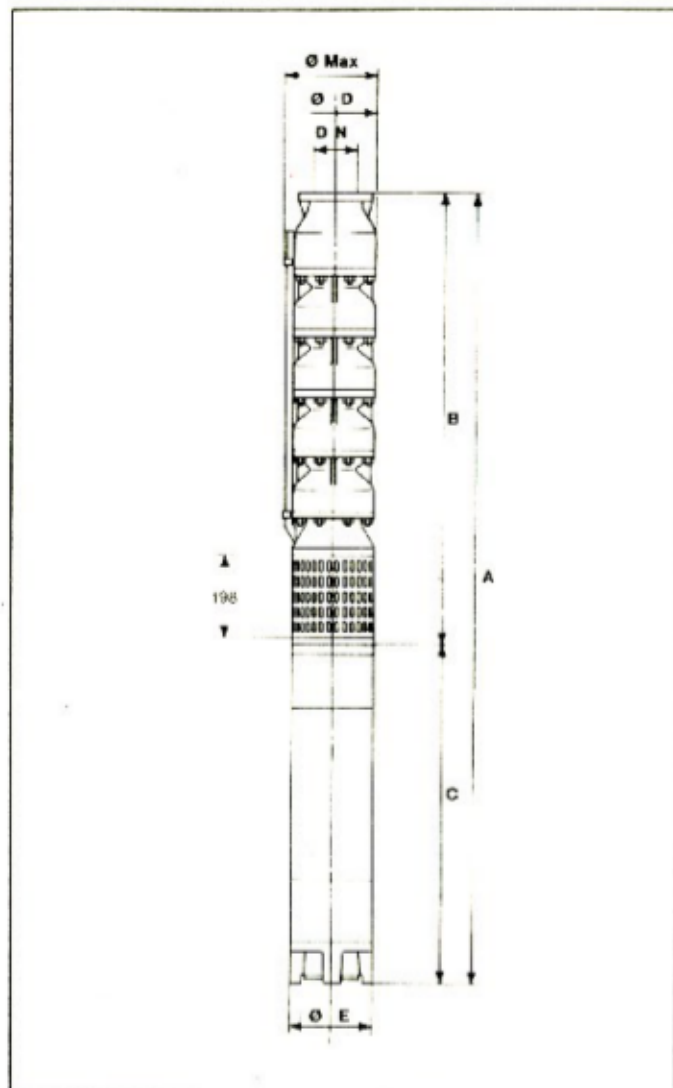

TIPO TYPL TYPE	Ø Max	A	B	C	D	E	Peso in Kg Poids en Kg Weight in Kg
		mm					
E10S55/1E + C615	1598	680	918				158
E10S55/1B + C620	1688	680	1008			140	168
E10S55/2F + C825	1943	845	1098				188
E10S55/2T + C830	2033	845	1188				197
E10S55/2X + C835	1866	845	1021				222
E10S55/2B + C840	1911	845	1066				230
E10S55/2A + C850	1996	845	1151				246
E10S55/3C + C850	2161	1010	1151			186	263
E10S55/3K + C860	2236	1010	1226	240			275
E10S55/3A + C870	2336	1010	1326				307
E10S55/4S + C870	2501	1175	1326				327
E10S55/4P + C880	2591	1175	1416				342
E10S55/4A + C1090	2418	1175	1243				396
E10S55/5Q + C10100	2653	1340	1313				437
E10S55/5A + C10125	2833	1340	1493			236	497
E10S55/6W + C10125	2998	1505	1493				514
E10S55/7M + C10150	3313	1670	1643				582

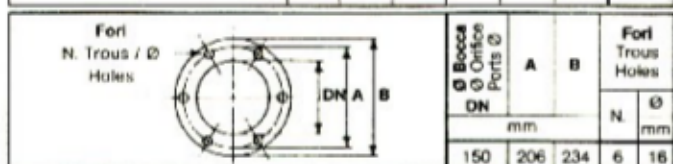

La pompa è corredata di guarnizione, controflangia e bulloni.
 La pompe est équipée avec garniture, contrebride et boulons.
 Pump is equipped with gasket, counterflange and bolts.

