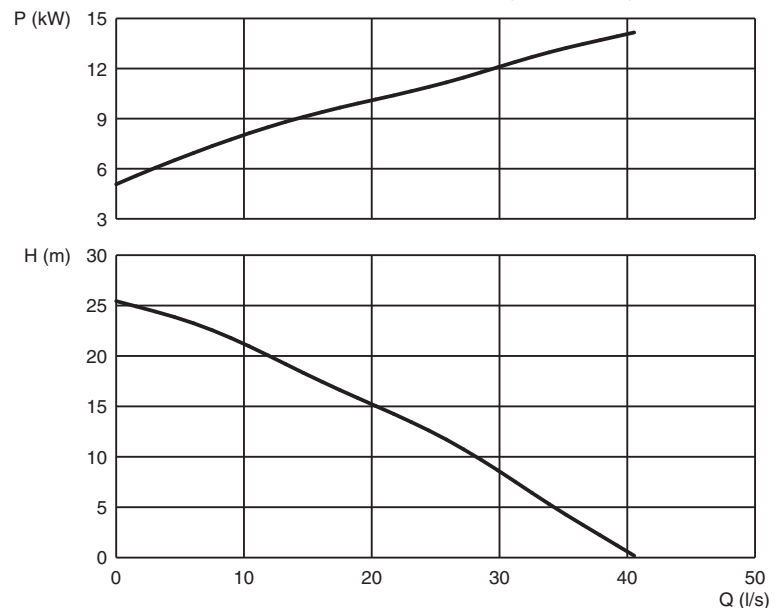


The curves have been designed according to ISO 2548C

**Classification**

Electrical submersible pump  
Protection class: IP68  
Max. submersion depth: 20 m

**Electrical motor**

Squirrel cage induction motor  
Insulation class: F (IEC 85)

**Technical data**

Parameter	Unit	Value
Shaft speed	r.p.m.	2850
Rated output	kW	11
Max. power cons.	kW	14
Rated current A at	230 V	39
	400 V	22
	500 V	18

*Other voltages on request*

**Motor protector**

Phase sequence control, phase failure guard, temperature guard with thermal contacts in the stator, airvalve (= SMART-system), DOL or star/delta

**Power cable**

H07RN-F, length 20 m  
4x10 mm<sup>2</sup>, U = 230 V  
4x4 mm<sup>2</sup>, U > 230 V

**Shaft seals**

Double mechanical face seals with an oil compartment between the seals

Material lower seal: Silicon carbide - silicon carbide

Material upper seal: Carbon - silicon carbide

**Bearings**

Lower: Double angular contact ball bearing with C3 clearance  
Upper: Ball bearing with C3 clearance

**Discharge connections**

4", hose, BSP or NPT

**Materials**

Casted parts	Aluminium
Outer casing	Stainless steel
Motor shaft	Stainless steel
Impeller	Cr-alloyed white cast iron
Screws and nuts	Stainless steel
Pump housing	Polyurethane

**Accessories**

Tandem connection  
Zinc anodes  
Float switch

**Limitations**

Max. submersion depth: 20 m  
Max. liquid temperature: 40°C  
Max. liquid density: 1100 kg/m<sup>3</sup>  
pH of the liquid: 5-8

*Specifications can be changed without notice.*