


TECHNICAL CHARACTERISTIQUES

Performance curves

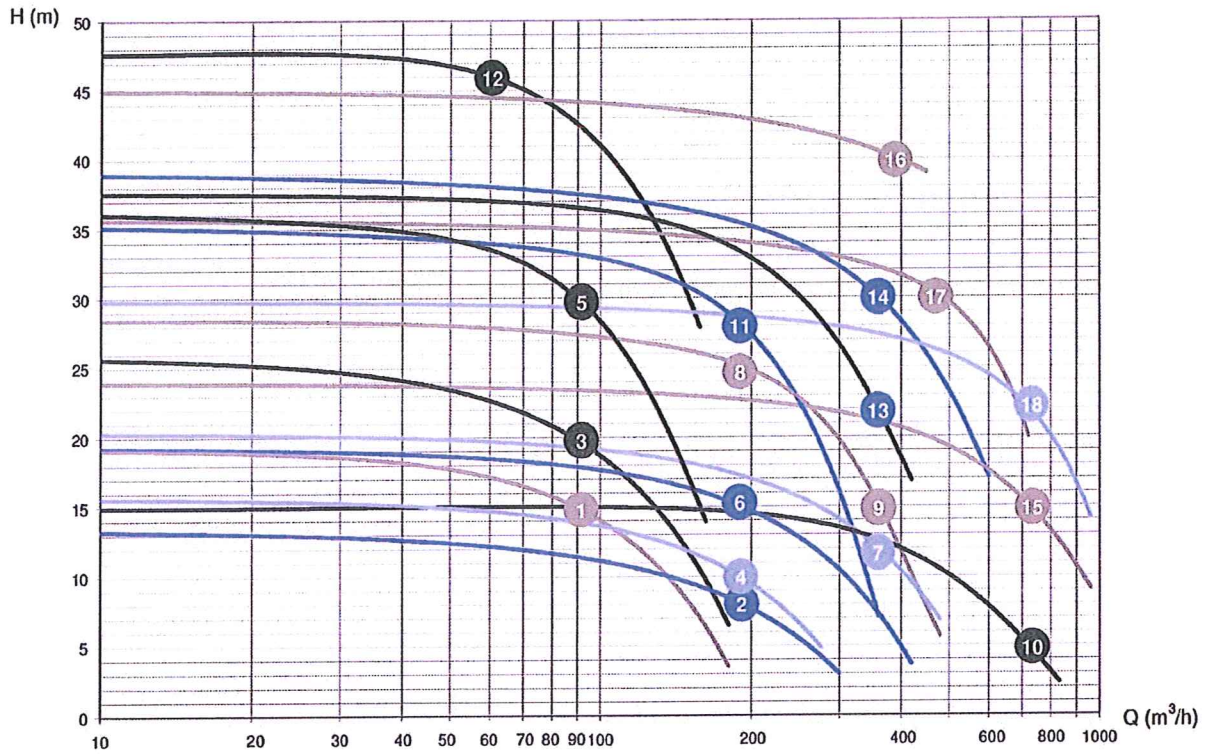

Nr	Type	Outlet (inch)(mm)	Capacity (m ³ /h)	Manom. head (m)	Particle size (mm)	Power (kW)	Revolution (1/min) 50Hz	Current (A) 400 V	Electr. cable	Weight (kg)
1	DP15 - 4	4 100	90	15	35	11	960	24	4X10mm ²	490
2	DP15B - 6	6 150	192	8	60	11	960	24	4X10mm ²	530
3	DP20 - 4	4 100	90	20	35	15	970	32	4X10mm ²	550
4	DP20B - 6	6 150	192	10	60	15	970	32	4X10mm ²	540
5	DP30 - 4	4 100	90	30	35	22	975	46	4X16mm ²	750
6	DP30B - 6	6 150	192	15	60	22	975	46	4X16mm ²	730
7	DP40B - 8	8 200	360	12	40	30	970	58	4X35mm ²	750
8	DP50 - 6	6 150	192	25	60	37	980	75	4X35mm ²	950
9	DP50B - 8	8 200	360	15	60	37	980	75	4X35mm ²	970
10	DP50BL - 10	10 250	720	5	100	37	980	75	4X35mm ²	1150
11	DP50H - 6	6 150	192	28	40	37	980	75	4X35mm ²	1050
12	DPS50S - 4	4 100	60	46	15	37	1775	61	4x35mm ²	730
13	DP75B - 8	8 200	360	22	40	55	975	116	4X50mm ²	1120
14	DP100B - 8	8 200	360	30	60	75	740	150	4X50mm ²	2200
15	DP100BL-10	10 250	720	15	100	75	740	150	4X50mm ²	2700
16	DP150 - 8	8 200	390	40	120	110	590	215	4X95mm ²	3500
17	DP150L - 8	8 200	480	30	120	110	590	215	4X95mm ²	3500
18	DP150B - 10	10 250	720	22	120	110	590	215	4X95mm ²	3500