

Technical Specifications

Performance	4"	6"	8"
	100mm	150mm	200mm
Engine Make:	Perkins	Perkins	Perkins
Engine Model:	403C-15G	404C-22G	1104C-44TG3
Power (kW/RPM):	15/1500	20.3/1500	48/1500
Pump Volute:	G25 cast iron	G25 cast iron	G25 cast iron
Impeller:	245	245	278
Solid Handling (mm):	34	75	80
Max. Capacity (Ltr/min):	2,500	5,500	10,900
Max. Head (m):	32	32	32
Max. Flow (m³ p/h):	150	330	650
Max. Vacuum (m):	9.2	9.2	9.2
Max. Noise (dBA at 7m):	65	65	65


Dimensions (excluding trailer)

Weight (kg):	1,200	1,250	1,380
Length (mm):	2300	2300	2980
Width (mm):	1000	1000	1200
Height (mm):	1300	1300	1695
Suction Height (mm):	300	300	300
Discharge Height (mm):	400	400	400




Performance Curve

100mm (4") Liquidator

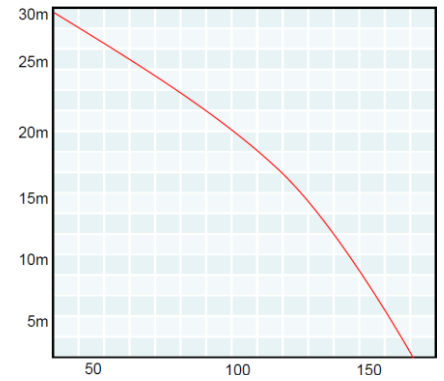

150mm (6") Liquidator

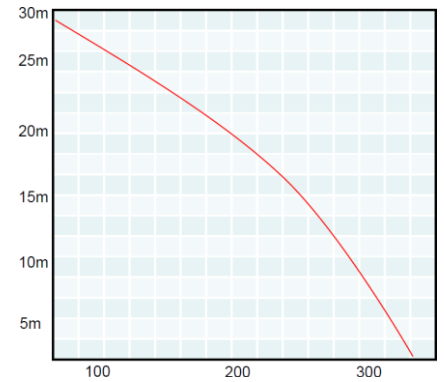

200mm (8") Liquidator

