
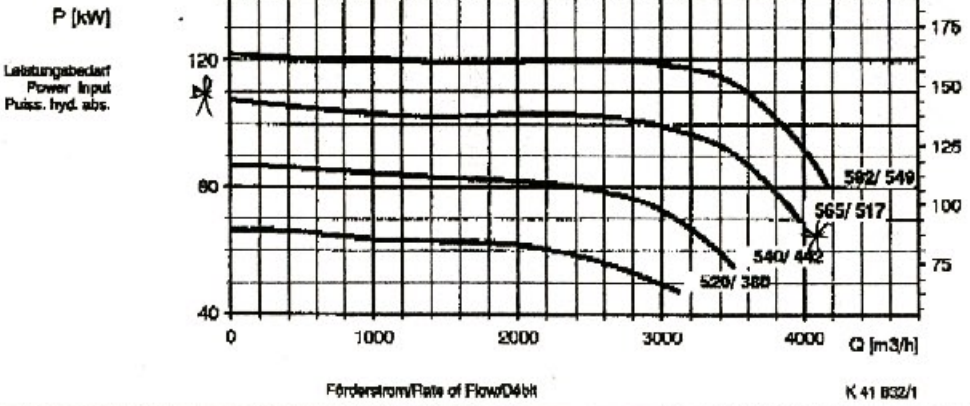


KRT K 500-540 / ...

725 1/min

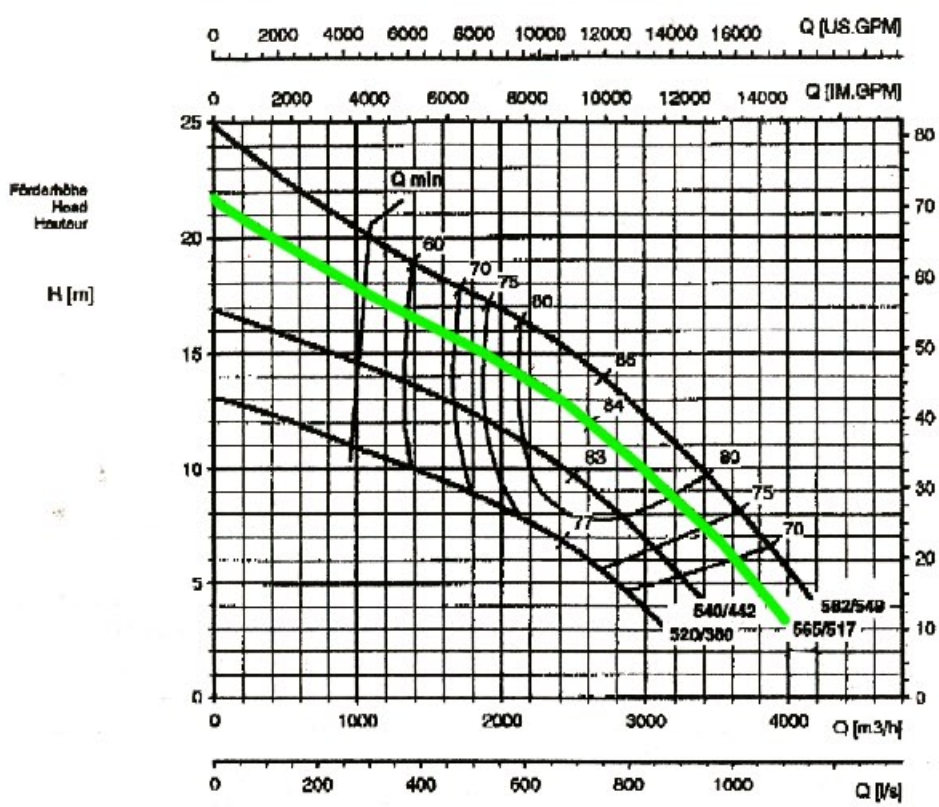

Kennlinien nach ISO 2548 C. Elles correspondent à la vitesse de moteur effective.

Curves as per ISO 2548 C. They correspond to the effective motor speed.

K-imp.

Verwendbare Motorgrößen / Suitable motor sizes / Définition taille moteur	Werkstoff / Material / Matériaux	
KRT K 500-540 / ...	G	Code No.
... / 878 U ..	67.0	2458..
... / 848 X ..	74.0	2459..
... / 848 W ..	67.0	2460..
... / 848 U ..		2461..
... / 1078 X2 ..	84.0	2462..
... / 1078 W2 ..		2463..
... / 1078 U2 ..		2464..
... / 1268 X2 ..	107.0	2465..
... / 1268 W2 ..		2466..

Verwendbare Motorgrößen / Suitable motor sizes / Définition taille moteur	Werkstoff / Material / Matériaux	
KRT K 500-540 / ...	G	Code No.
... / 1268 U2 ..		2467..
... / 1508 X2 ..	126.0	2468..
... / 1508 W2 ..		2469..
... / 1508 U2 ..		2470..
... / 1808 X2 ..	150.0	2471..
... / 1808 W2 ..		2472..

K 41 B32/1