


200-60 x CD4

CURVE AP-8
 ISSUE 2

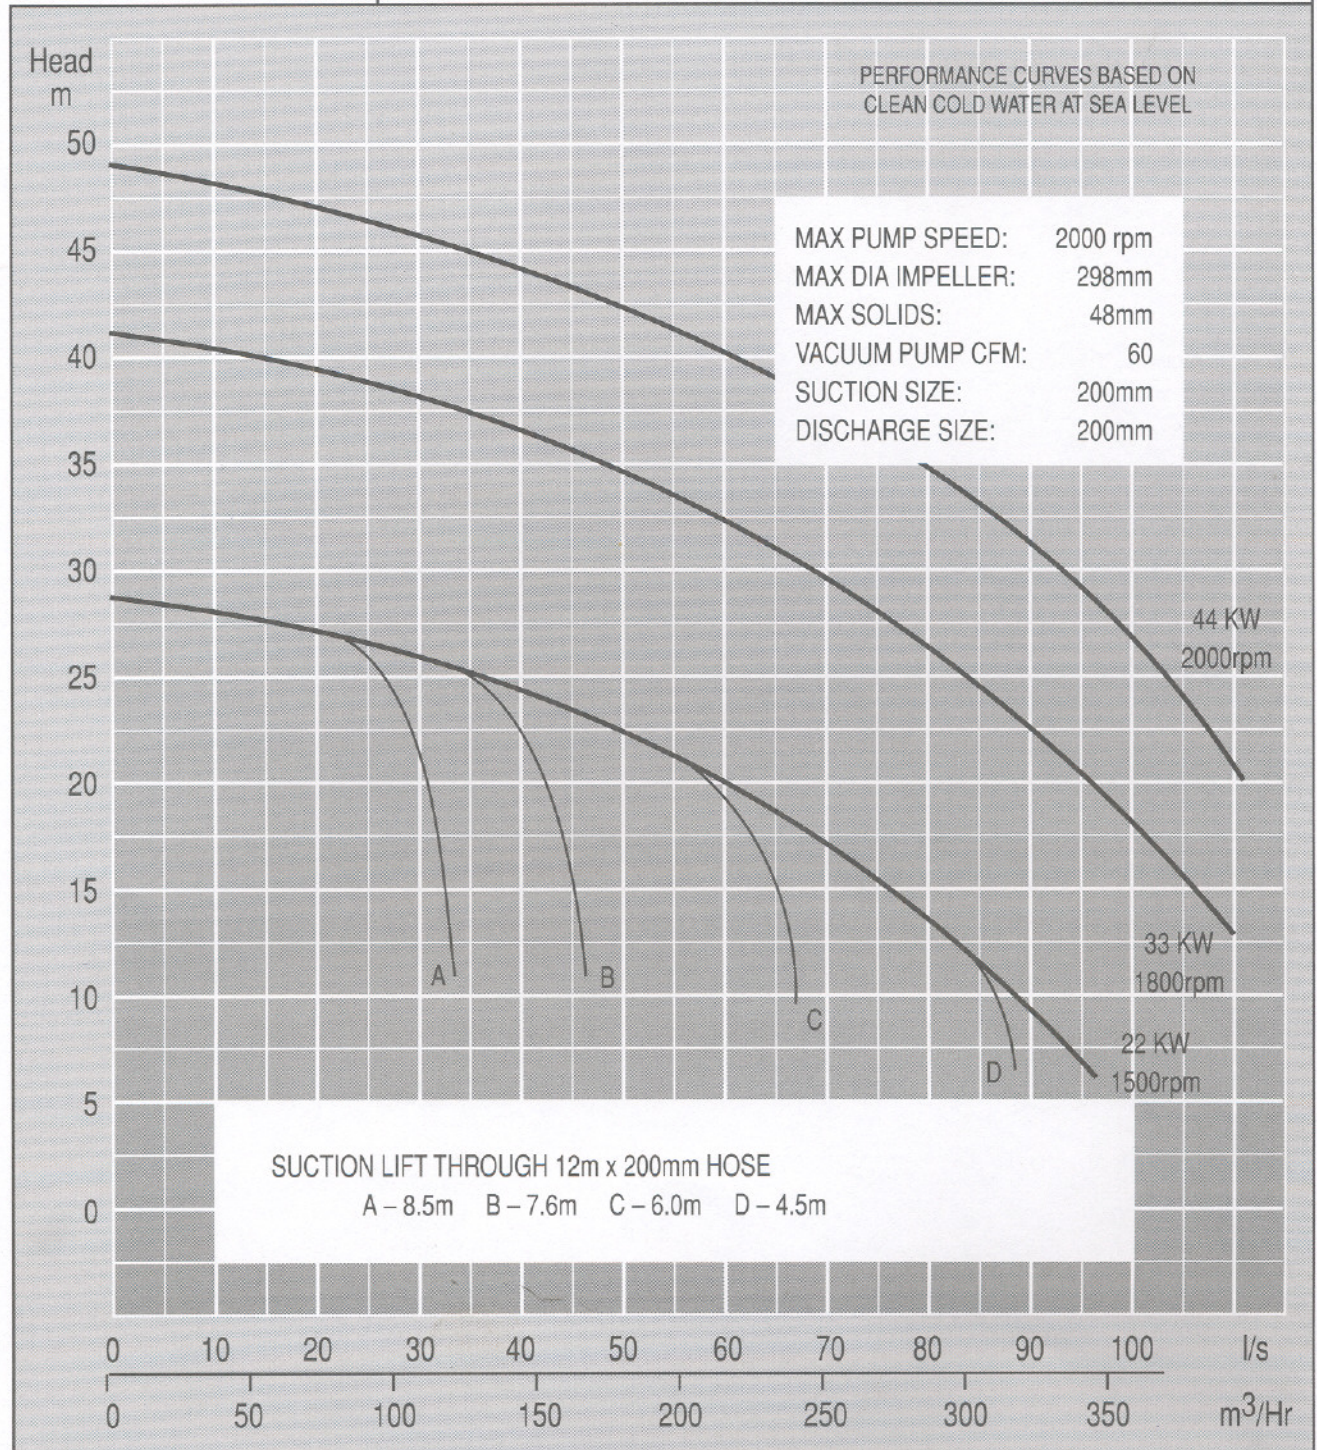

Volute	Angle discharge, Horizontal suction. Cast Iron.	NRV	Ball type polyurethane with reversible seat.
Impeller	2 vane Open. Cast Iron.	Priming	Continuous with mechanical and pressure differential control.
Wear Plate	SNG Cast Iron.	Air Handling	Oil lubricated rotary vacuum pump.
Pump Shaft	Steel (BS970 EN8B).	Chassis	Box steel section combining a 122 litre fuel tank. 16 Hours running time.
Bearings	DE: Back-to-back Angular contact ball NDE: Cylindrical Roller. L ₁₀ Life: 40,000 hrs at 2000rpm (BEP).	Wheels	Four solid rubber or two pneumatic or two road trailer.
Shaft Seal	Semi-mechanical. Replaceable on site.		200-60 x CD4 with Towbar (cm) 257 x 154 x 186. 1170 kg. 1200-60 Pump End (cm) 110 x 82 x 120. 492 kg.