

QI150 - 150mm Enclosed Automatic Priming Pump

The SPP AUTOPRIME QI150 pump is a fully enclosed diesel driven pump unit with high efficiency, designed to pump most liquids including sewage and semi solids. The enclosure provides sound reduction and security for use in noise sensitive areas. Typical uses are removal of ground and rain water from excavations, trenches, footings, manholes and ponds etc. May also be used for stream and pipe diversions and flood water control, well point dewatering, pipe relining and sludge pumping.



DESIGN FEATURES

- Bunded unit on two wheel road trailer with fixed height towing eye or 50mm ball hitch.
- Alternative trailer for the QI150 with variable height draw bar is available (adds 35 kg to weight).
- 12 volt battery starting by key switch.
- Pump will pass solids up to 65mm diameter and 80mm long.
- Reliable double mechanical seals which allow dry running.
- Pump can be left running when liquid is exhausted and will prime automatically when liquid is present.
- Rugged construction requires minimal operator maintenance.
- 65 cfm Vacuum Pump with coalescer and air filtered before exhaust to atmosphere.
- Features efficient 'Smartprime' technology for energy saving and reliability.


PUMP SPECIFICATIONS

Flow Rate	380 m ³ /h Maximum	
Discharge Head	25 m Maximum	
Working Pressure	10 bar Maximum	
Suction Hose Size	150 mm (6 in) Dia.	
Discharge Hose Size	150 mm (6 in) Dia.	
Max Solids Size	65 mm Diameter x 80 mm	
Pump Casing	Cast Iron	
Impeller	SG Iron	
Pump Shaft	Stainless Steel	
Wear Plates	SG Iron	
Suction Sump	Cast Iron	
Specifications may be auticat to change without notice		


Shaft Seal	Silic	Silicon Carbide/Silicon Carbide		
Elastomer		Viton		
Diesel Engine		Isuzu 3CE1 Water Cooled		
Power Rating		17.1kW @ 2200		
Starting	12	12 Volt Battery by Key Switch		
Sound Pressure Level		65 dBA at 7 metres		
Fuel Tank Capacity		220 litres		
Full Load Consumption		5.2 litres / hour average		
Full Load Running Time		42 hours		
Chassis Options Skid Mo		ounted or Pod for Mounting		
Weight - Wet	With Fix	ed Height Drawbar 1313kg		

Specifications may be subject to change without notice.

QI150rev03 Trailers

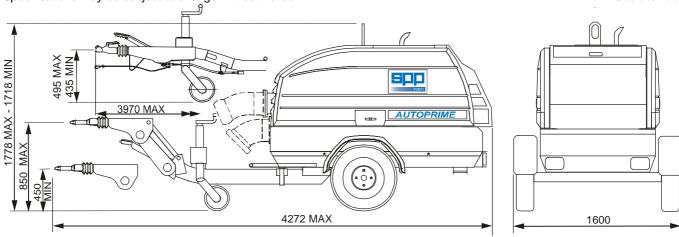

Tel: ++44(0) 1189 323 123 Fax: ++44(0) 1189 323 302

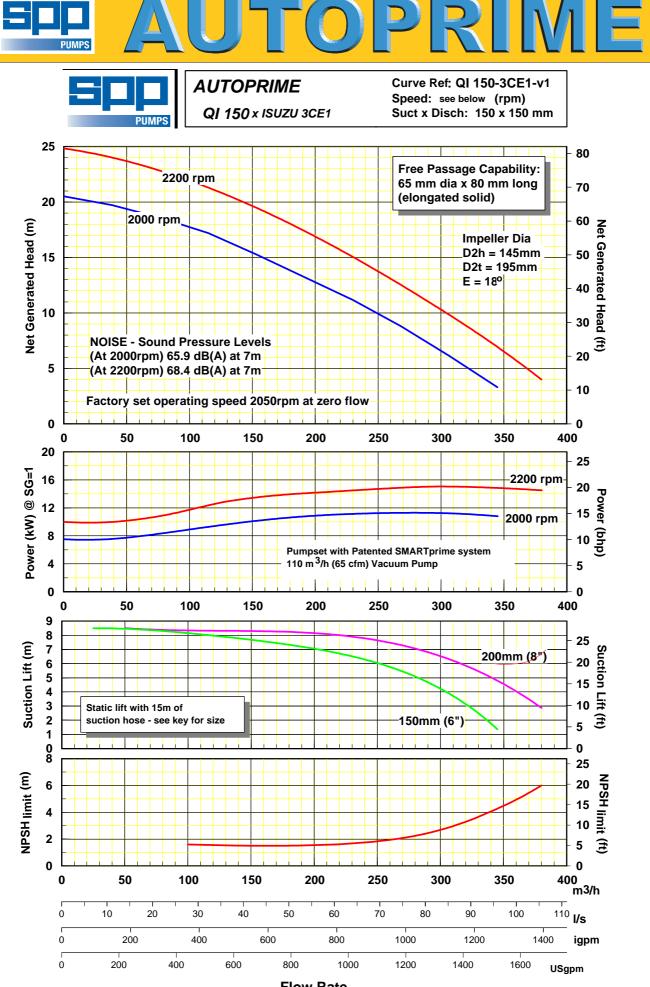

Flow Rate