



Seltorque 150C

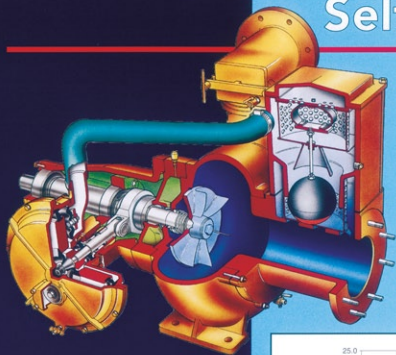

PUMP DETAILS

Power Requirement (kw)	24
Pump Speed (rpm)	1600
Capacity (m ³ /h)	350
Suction Lift (m)	9.1
Max Solids Size (mm)	100
Air Handling (l/s)	48 twin
Air Handling (l/s)	24 single
Inlet Port (mm)	150
Outlet Port (mm)	150
Delivery Head (m)	21.3
Self Priming Lift (m H ₂ O)	8.6

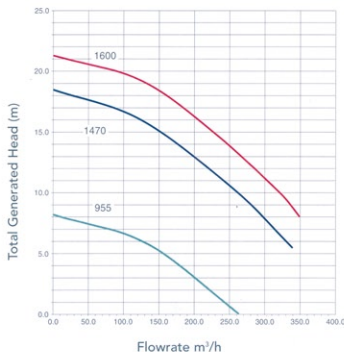

BUILD OPTIONS

	Hatz	Deutz	Electric
Width (mm)	1340	1340	650
Height (mm)	1465	1824	978
Length (mm)	2890	2650	1715
Fuel Capacity (ltr)	105	105	NA
Dry Weight (kg)	1155	1070	850



Seltorque 150C



- Indefinite Dry Running**
- Automatic Priming**
- Mobile, Skid or Fast Tow**
- Max. Delivery Head 21.3m**
- Reliable**
- Robust Design**
- Simple Maintenance**
- Air Handling Up To 48 l/s**
- Solids Up To 100mm**
- Alternative Prime Movers & Chassis Designs**

APPLICATIONS

- Clean Water ● Muddy Water**
- Water With Fine Solids**
- Water With Larger Solids**
- Water With Rags & Fibres ● Sludges**
- Slurries ● Oils & Hydrocarbons**
- Wellpointing ● Screened Sewage**
- Unscreened Crude Sewage**

Vortex Flow Pump

The "Vortex Flow" auto-priming 150C pump offers unequalled performance in effluent disposal duties and slurry handling.

Oil immersed shaft bearings and mechanical seal allow continuous dry running.