


Selwood High Head 'H' Range

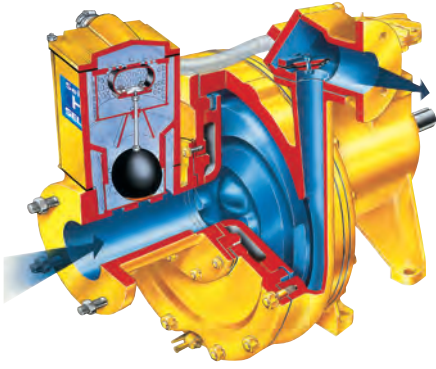

Features

- Total heads up to 158m
- Mechanical shaft sealing
- Environmentally friendly Selprime automatic self priming
- HM - hard metal pumps for abrasive applications
- Emission compliant engines
- Ease of operation & maintenance
- Robust construction

Options

- Super Silent canopy - lockable and fully banded
- Skid or static chassis
- Oil drain kit
- Auxiliary fuel connection

Applications


- High head dewatering
- Pipeline testing & cleaning
- Water boosting
- High volume jetting
- Temporary fire pump

Industries

- Quarry & mining
- Construction & civil engineering
- Ground stabilisation and piling
- Oil & gas
- Marine
- Water & waste water
- Rental
- Industrial

Specification		H80	H100	H125	H150	H200	H100 HM	H150 HM	H200 HM
Capacity	m ³ /h	95	225	TBA	450	750	225	450	950
Total Head	m	95	120	TBA	106	158	79	95	85
Solids Size	mm	19	30	TBA	30	45	30	38	60
Self Priming Lift	m	8.8	8.8	TBA	8.8	8.8	8.8	8.8	8.8
Air Handling	l/s	4.25	24	TBA	24	24	24	24	24
Power Required	kW	30	82	TBA	138	330	87	130	250
Pump Speed	rpm	2000	2200	TBA	1800	1800	2200	1800	1600
Inlet / Outlet	mm	80	100	TBA	150	200	100	150	200

Data Sheets are available at www.selwoodpumps.com

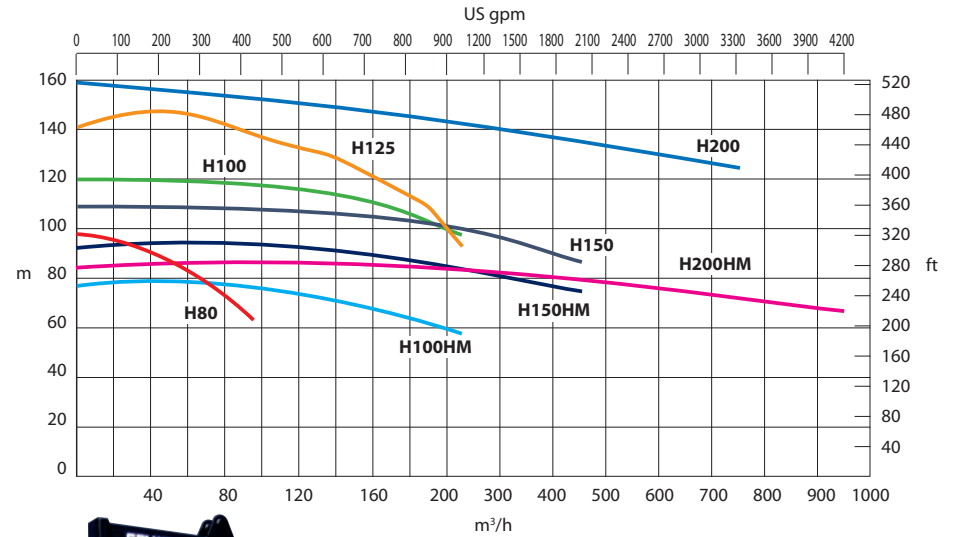

H150



H200



H100