


## 150M-60 x TR3

CURVE AP-7  
 ISSUE 2

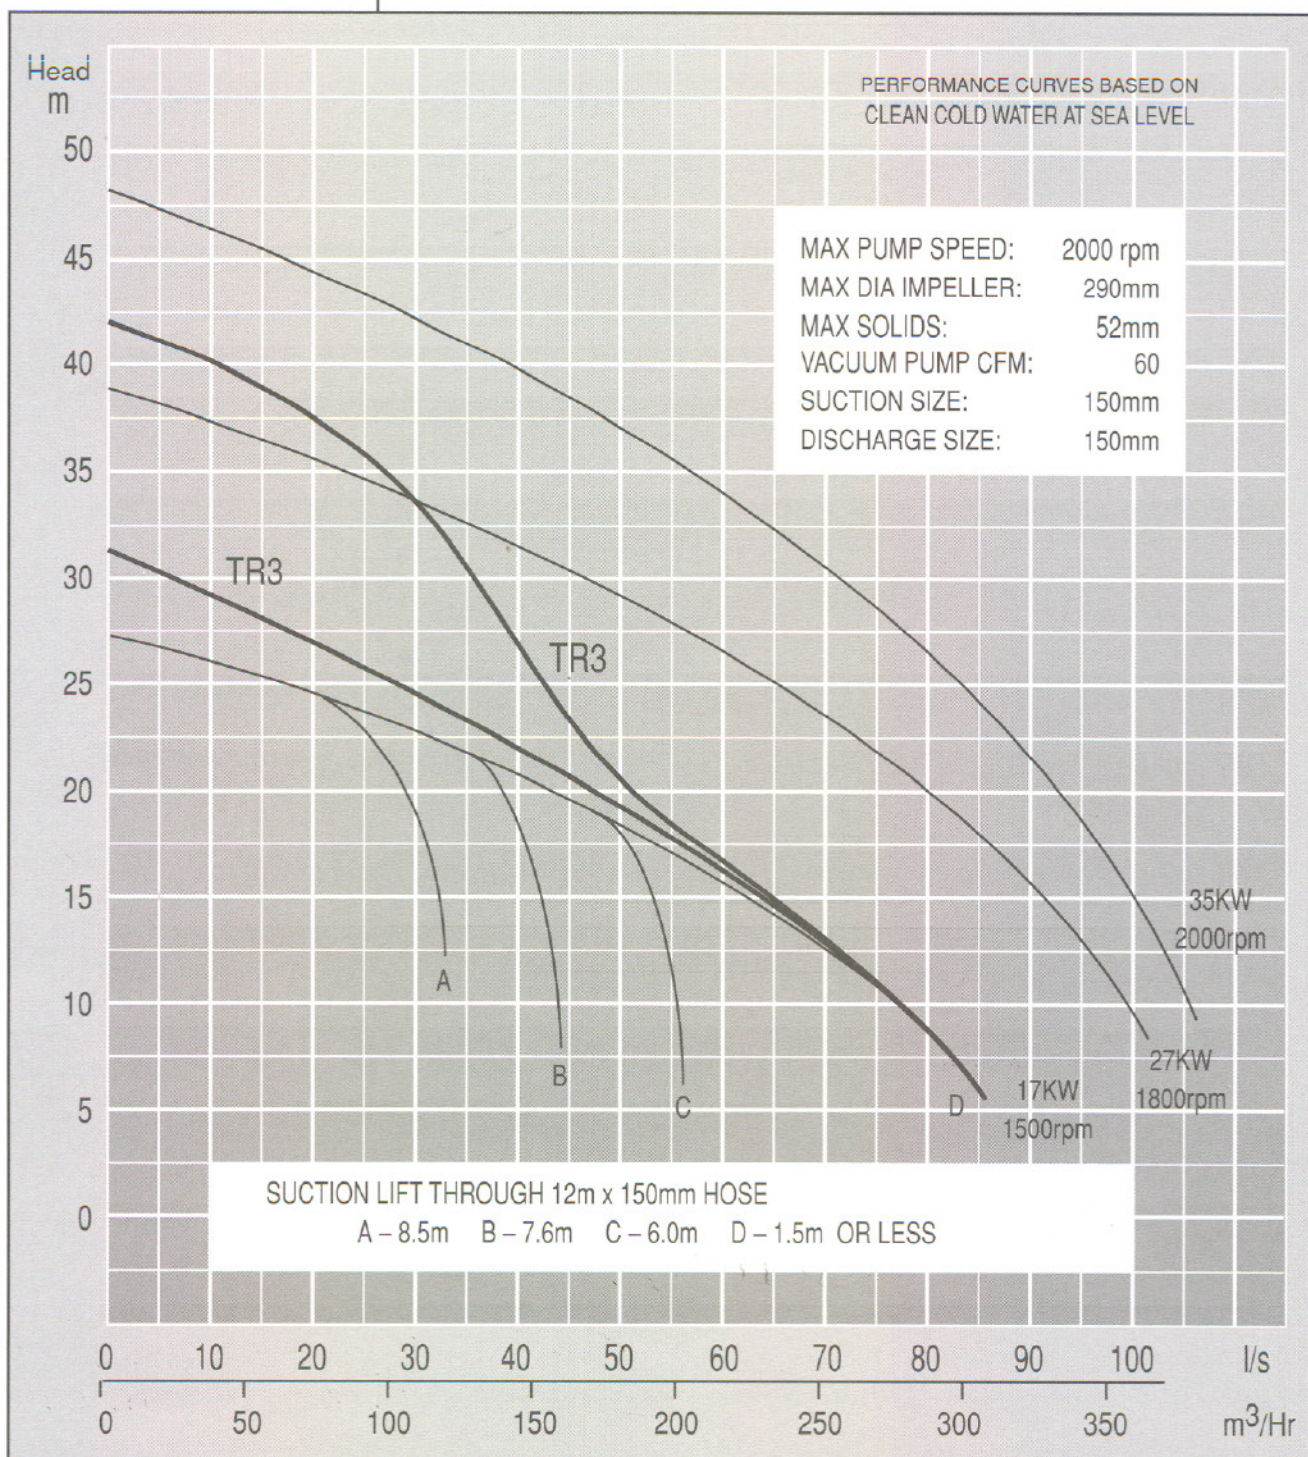

<b>Volute</b>	Angle discharge, Horizontal suction. Cast Iron.	<b>NRV</b>	Ball type polyurethane with reversible seat.
<b>Impeller</b>	2 vane Open. Cast Iron.	<b>Priming</b>	Continuous with mechanical and pressure differential control.
<b>Wear Plate</b>	SNG Cast Iron.	<b>Air Handling</b>	Oil lubricated rotary vacuum pump.
<b>Pump Shaft</b>	Steel (BS970 EN8B).	<b>Chassis</b>	Box steel section combining a 122 litre fuel tank. 25 Hours running time.
<b>Bearings</b>	DE: Twin Taper Roller NDE: Cylindrical Roller. L <sub>10</sub> Life: 40,000 hrs at 2000rpm (BEP).	<b>Wheels</b>	Four solid rubber or two pneumatic or two road trailer.
<b>Shaft Seal</b>	Semi-mechanical. Replaceable on site.	<b>150M-60 x TR3 without Towbar (cm)</b>	212 x 146 x 160. 950 kg.
		<b>150M-60 Pump End (cm)</b>	110 x 82 x 120. 474 kg.