

MT

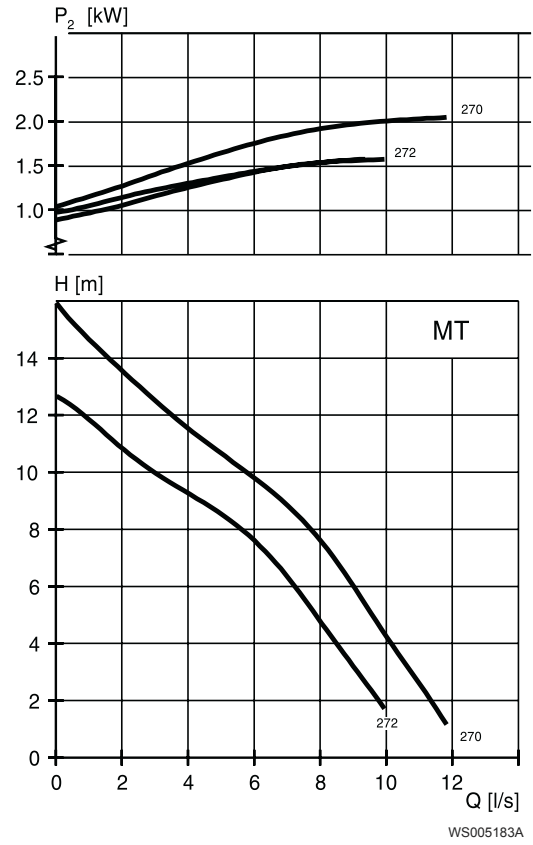
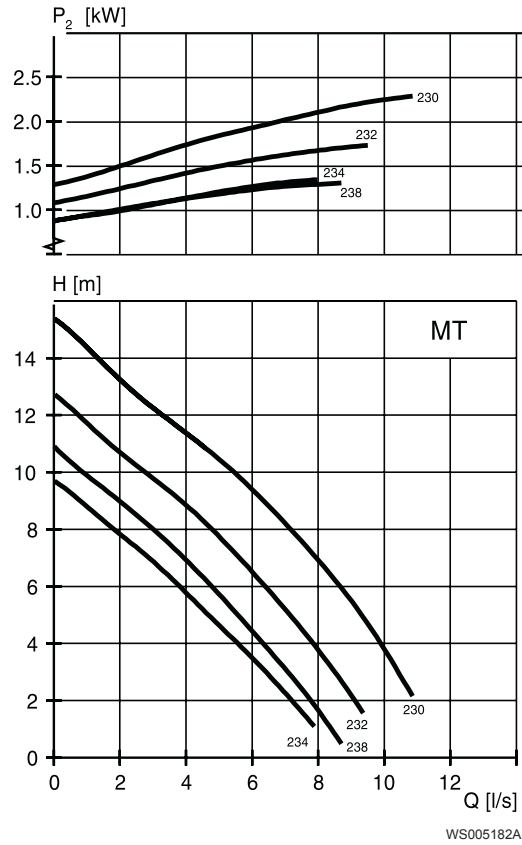


Figure 1: Abrasion Resistant Version

Table 7: 400 V, 50 Hz, 3-phase

Rated power, kW	Rated power, hp	Curve/ Impeller No	Revolutions per minute, rpm	Rated current, A	Starting current, A	Power factor, cos φ	Installation
1.7	2.3	232	2695	3.8	17	.87	F,P,S
1.7	2.3	234	2695	3.8	17	.87	F,P,S
2.4	3.2	230	2775	5.1	27	.86	F,P,S
2.4	3.2	232	2775	5.1	27	.86	F,P,S
2.4	3.2	234	2775	5.1	27	.86	F,P,S
2.4	3.2	270	2775	5.1	27	.86	F,S
2.4	3.2	272	2775	5.1	27	.86	F,S