

2 Non-clog

2.1 Product description



Usage

A submersible pump for efficient pumping of clean water, surface water, and wastewater containing solids. The pump is designed for sustained efficiency over time.

Denomination

Type	Non-explosion proof version	Explosion proof version	Model variant	Installation types
Non-clog	1310.181	1310.090	S - Super high head	<ul style="list-style-type: none"> • Free-standing • Wet-well

The pump can be used in the following installations:

Free-standing Portable semipermanent, wet well arrangement with hose coupling or flange for connection to the discharge pipeline.

Wet-well Semipermanent, wet well arrangement with the pump installed on two guide bars. The connection to the discharge is automatic.

Application limits

Feature	Description
Liquid temperature	Maximum 40°C (104°F)
Depth of immersion	Maximum 20 m (65 ft)
pH of the pumped liquid	5.5 - 14
Liquid density	Maximum 1100 kg/m ³

Motor data

Feature	Description
Motor type	Squirrel-cage induction motor
Frequency	50 Hz
Power supply	1-phase or 3-phase
Starting method	<ul style="list-style-type: none"> • Direct on-line • Variable Frequency Drive (VFD)
Number of starts per hour	Maximum 15
Code compliance	IEC 60034-1
Voltage variation without overheating	±10%, if it does not run continuously at full load
Voltage imbalance between phases	Maximum 2%
Stator insulation class	F (155°C [311°F])

Cables

Application	Type
Direct-on-line start or Y/D start with two cables	Flygt SUBCAB® - a heavy duty 4 cores motor power cable with two twisted pair screened control cores. Conductor insulation rating of 90°C, which allows for increased current. Superior mechanical strength and high abrasion and tear resistant. Chemical resistant within pH 3-10 and ozone, oil, and flame resistant. Used up to 70°C water temperature. Cables < 10 mm ² with unscreened control cores.
Y/D start	Flygt SUBCAB® - a heavy duty 7 cores motor power cable with two twisted pair screened control cores. Conductor insulation rating of 90°C, which allows for increased current. Superior mechanical strength and high abrasion and tear resistant. Chemical resistant within pH 3-10 and ozone, oil, and flame resistant. Used up to 70°C water temperature. Cables < 7G6 mm ² with unscreened control cores.

Monitoring equipment

Motor	Thermal contacts opening temperature
13-10-2B, 13-13-2B, 13-10-4B	125°C (257°F)
13-10-4B	140°C (284°F)

Materials

Table 9: Major parts except mechanical seals

Denomination	Material	ASTM	EN
Major castings	Cast iron, gray	30B	GJL-200
Pump housing	Cast iron, gray	30B	GJL-200
Impeller	Cast iron, gray	30B	GJL-200
Lifting handle	Stainless steel	AISI 304	1,4301
Shaft	Stainless steel	AISI 431 or AISI 420	1.4057 or 1.4021/1.4028
Screws and nuts	Stainless steel, A2	AISI 304	1.4301, 1.4306, 1.4307, 1.4311
O-rings	Nitrile rubber (NBR) 70° IRH	-	-

Denomination	Material	ASTM	EN
Oil, part no 901752	Medical white oil of paraffin type. Fulfills FDA 172.878 (a)	-	-

Table 10: Mechanical seals

Inner seal	Outer seal
Carbon (CSb)/ Aluminum oxide (Al ₂ O ₃)	Corrosion resistant cemented carbide (WCCR)/ Aluminum oxide (Al ₂ O ₃)

Surface treatment

Finish
Black or blue two-component high-solid top coating. See internal standard M 0700.00.0004 for standard painting.

Options

- Leakage sensor in the stator housing (FLS)

Accessories

- Installation equipment
Sold in kits
- Mechanical accessories such as discharge connections, adapters, and hose connections
- Electrical accessories such as pump controller, control panels, starters, monitoring relays, and cables

2.2 Motor rating and performance curves

These are examples of motor rating and curves. For more information, please contact your local sales and service representative.

Star-delta starting current is 1/3 of Direct on-line starting current.

S

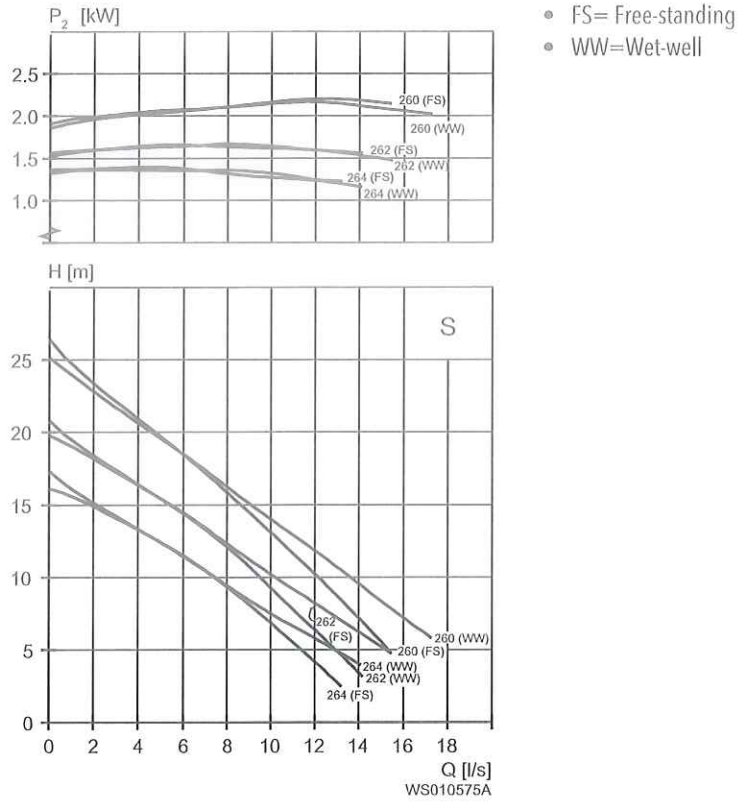


Table 11: 400 V, 50 Hz, 3-phase

Rated power, kW	Rated power, hp	Curve/ Impeller No	Revolutions per minute, rpm	Rated Current, A	Start current, A	Power Factor, cos φ	Installation
2.4	3.2	260	2780	5.1	27	0.86	FS, WW
1.7	2.3	262	2855	3.8	27	0.79	FS, WW
1.4	1.9	264	2885	3.3	27	0.73	FS, WW

- FS= Free-standing
- WW=Wet-well

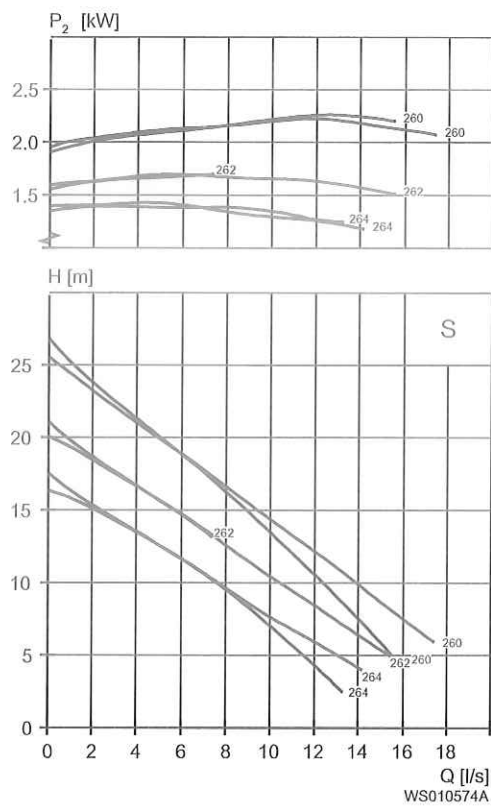


Table 12: 230 V, 50 Hz, 1-phase

Rated power, kW	Rated power, hp	Curve/ Impeller No	Revolutions per minute, rpm	Rated Current, A	Start current, A	Power Factor, cos φ	Installation
2.4	3.2	260	2810	14	48	0.96	FS, WW
1.7	2.3	262	2880	10	48	0.95	FS, WW
1.5	2	264	2900	8.9	48	0.95	FS, WW
1.4	1.9	264	2905	8.4	48	0.94	FS

- FS= Free-standing
- WW=Wet-well