


Medium Head Open Set

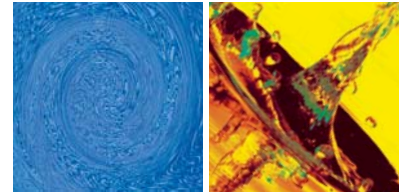

The SPP Autoprime range is a proven, versatile and comprehensive product range suitable for use in a variety of applications worldwide.

The Autoprime is primarily sold to rental organisations, contractors, utility companies, open cast mines and municipalities providing a durable solution to all your needs.

The Autoprime range of AC, L, PM and PE general purpose pumps offer the advantage of the lower cost package but with the opportunity to pick and choose the level of technology that is required.

The AC (Air Cooled) L (Long Coupled) ranges are the traditional range that has been in use for many years in many applications. The range offers a slightly higher head capability than the PM/PE range. Pump sizes from 2" (50mm) to 8" (200mm).

The PM Series range brings in more efficient pump ends with a higher flow capability than the L Series and elongated solids handling capability. Fitted with a mechanical priming system identical to the L Series but with the added benefit of the low emission coalescer and higher capacity vacuum pump as used on the Q-Series range.


The PE series takes the technology a stage further in addition to those benefits experienced with the PM range there is the added bonus of the electric priming system that senses when the pump is primed saving on fuel costs and wear & tear. The PE priming system is identical to that used on SPP's award winning Q-Series.

Typical Applications:

- Ground water control
- Mine dewatering
- Wellpoint dewatering
- Industrial sludge pumping
- Tank sediment cleaning
- Flood relief
- Emergency service pumping
- Pipe relining
- Marine ballasting
- Sewage over-pumping
- Plus many more



Medium Head Open Sets Range Chart

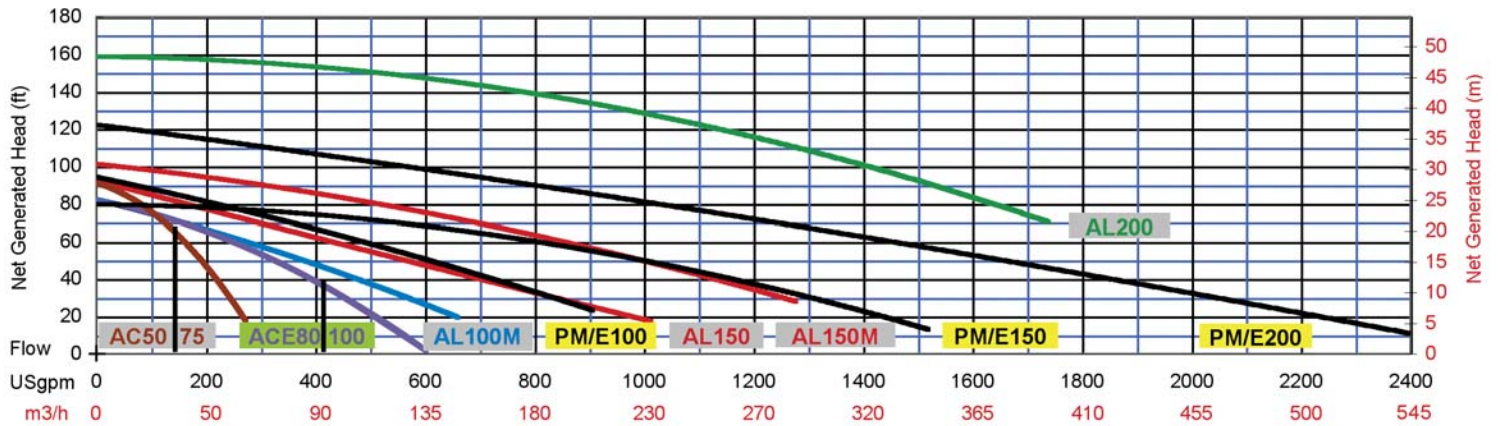


Key Features and Benefits:

- Low emission coalescer (PM/PE)
- Fuel savings with SmartPrime electric priming (PE)
- Leak free double mechanical seals
- Dry running capability
- Customer choice of the latest emission compliant engines
- High interchangeability of parts
- Heavy duty shaft and bearings
- High efficiency pump hydraulics
- Heavy duty and durable vacuum pump
- Reduced maintenance
- Integrated central lifter
- Excellent flow and head performance
- Excellent solids handling capability
- Quality design and parts offering durability
- Comprehensive range from 2" (50mm) to 8" (200mm)
- Proven technology



Assessed to ISO 9001:2000
Certificate No. 111



Certificate number: EMS111
Issue 1



www.sppumps.com